

# **LUBING**

## **SLOPE REGULATOR**


FOR POULTRY REARING AND FINISHING



## THE ADVANTAGES OF THE LUBING SLOPE REGULATOR

- The valve of the slope regulator will remain open until the pressure in the drinking line has reached the predetermined level. If this level is reached, the valve closes automatically and keeps the water column consistently and safely at the desired level.
- The adjustable slope regulator compensates variable a height difference of 10–45 cm.

## SELECTION AND VERSIONS

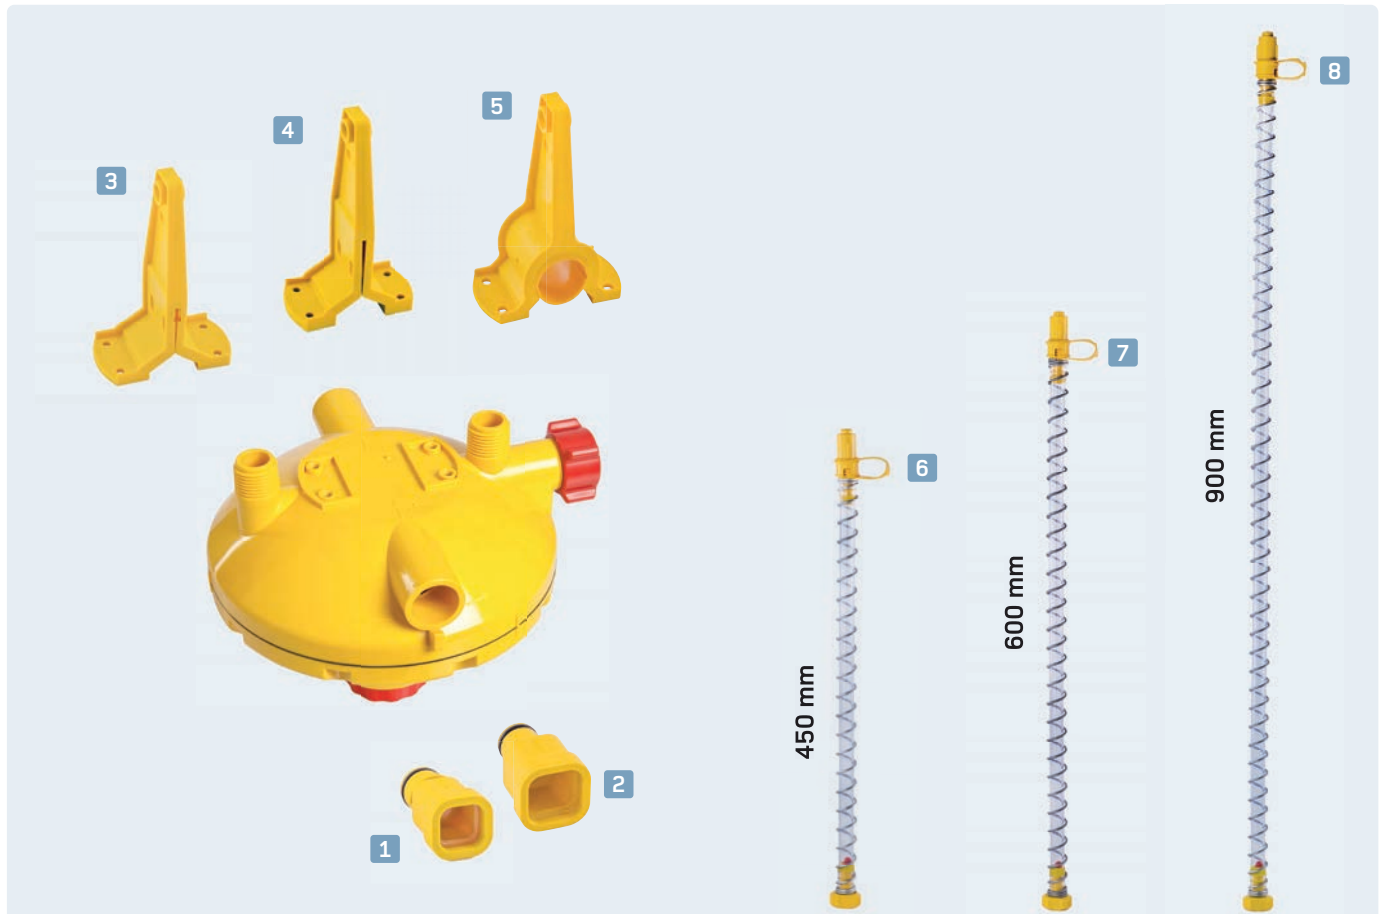

Transition pieces from the slope regulator to:

	1 22 mm square pipe: Art. No. 3303-00			2 28 mm square pipe: Art. No. 3304-00		
	Breather unit			Breather unit		
Hanger	6	7	8	6	7	8
	450 mm	600 mm	900 mm	450 mm	600 mm	900 mm
3 Aluminum profile	3242-00	3242-6-00	3242-9-00	–	–	–
4 Turkey profile	–	–	–	3243-00	3243-6-00	3243-9-00
5 Round pipe Ø 25,4 and 26,7 mm	3244-00	3244-6-00	3244-9-00	3245-00	3245-6-00	3245-9-00

Max. 3 slope regulators in one watering line.

# LUBING

Further information under  
[WWW.LUBING.COM](http://WWW.LUBING.COM)

**LUBING Maschinenfabrik GmbH & Co. KG**

Lubingstraße 6 · 49406 Barnstorf

☎ +49(0)54 42 - 9879-0

☎ +49(0)54 42 - 9879-33

[www.lubing.com](http://www.lubing.com) · [info@lubing.com](mailto:info@lubing.com)

0829-1/22-03 · Subject  
to technical changes.