

LUBING

SLOPE REGULATOR


FOR POULTRY REARING AND FINISHING



THE ADVANTAGES OF THE LUBING SLOPE REGULATOR

- The valve of the slope regulator will remain open until the pressure in the drinking line has reached the predetermined level. If this level is reached, the valve closes automatically and keeps the water column consistently and safely at the desired level.
- The adjustable slope regulator compensates variable a height difference of 10–45 cm.

SELECTION AND VERSIONS

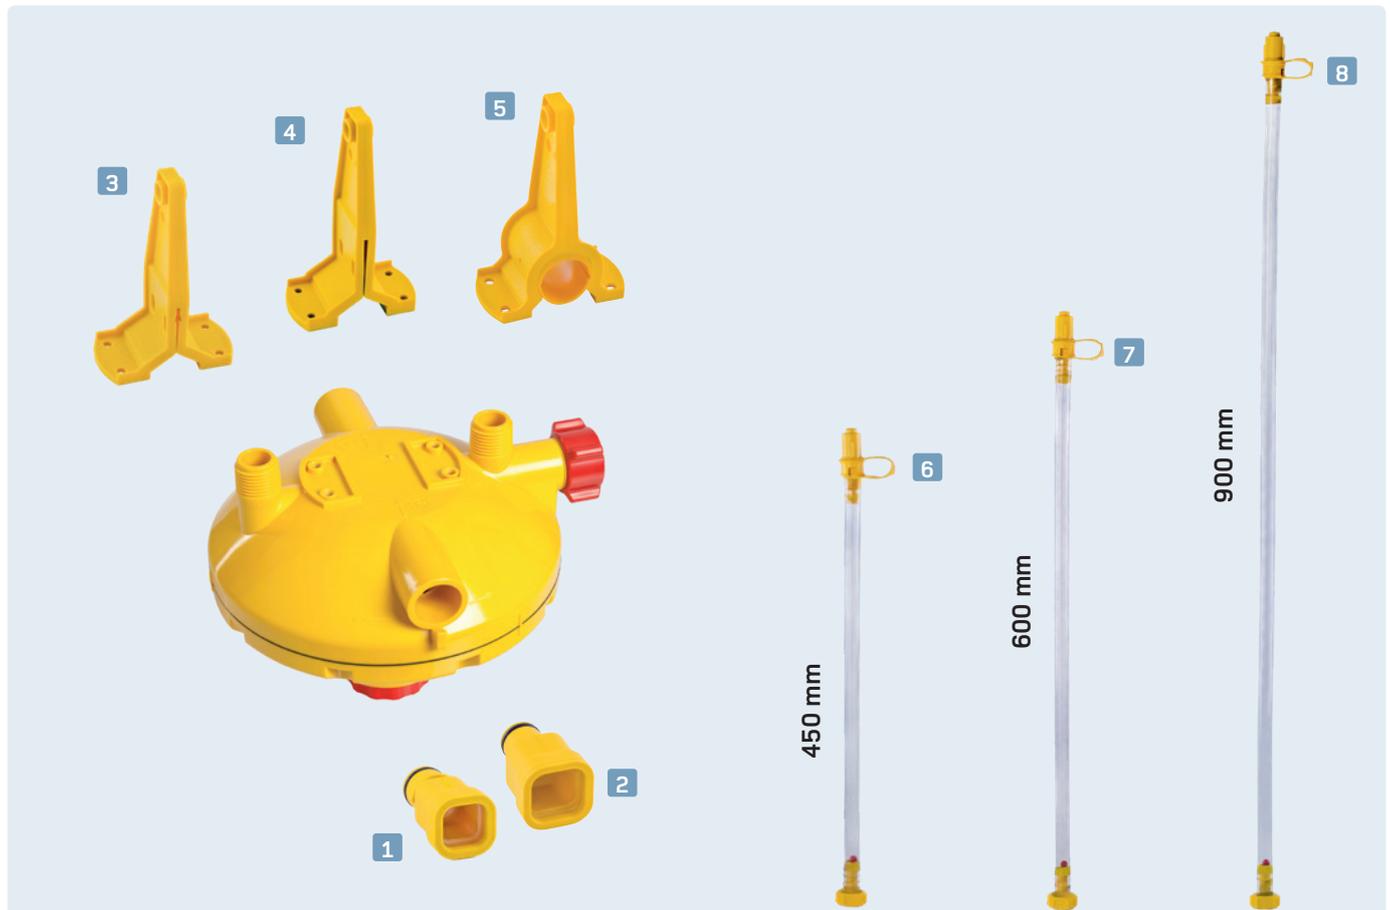

Transition pieces from the slope regulator to:

1 22 mm square pipe: Art. No. 3303-00

2 28 mm square pipe: Art. No. 3304-00

Breather unit

Breather unit

Hanger	Breather unit			Breather unit		
	6	7	8	6	7	8
450 mm	450 mm	600 mm	900 mm	450 mm	600 mm	900 mm
3 Aluminum profile	3242-00	3242-6-00	3242-9-00	–	–	–
4 Turkey profile	–	–	–	3243-00	3243-6-00	3243-9-00
5 Round pipe \varnothing 25,4 and 26,7 mm	3244-00	3244-6-00	3244-9-00	3245-00	3245-6-00	3245-9-00

Max. 2 slope regulators in one watering line.

LUBING

Further information under
WWW.LUBING.COM

LUBING Maschinenfabrik GmbH & Co. KG

Lubingstraße 6 · 49406 Barnstorf

☎ +49(0)54 42 - 9879-0

☎ +49(0)54 42 - 9879-33

www.lubing.com · info@lubing.com

0829-1/26-02 · Subject
to technical changes.