

## OPTIMA E-FLUSH

### VERSION WITH ACTUATOR FOR AUTOMATIC FLUSHING

Optional screw-in actuators for automatic flushing: The LUBING flush control „LCW Touch Control“ sequentially switches the actuators which open the integrated flush valve of the Optima E-Flush pressure regulator. The required voltage is provided by the LCW control in 24 V DC. The cable length of the actuators of 7,5 m ensures flexible handling. Manual flushing remains possible even with actuator.



With actuator for automatic flushing



Without actuator, manual flushing

# LUBING

POULTRYTEC

# LUBING

POULTRYTEC


LUBING Maschinenfabrik GmbH & Co. KG  
Lubingstraße 6 | 49406 Barnstorf  
Germany

T +49 (0) 54 42 98 79 - 0  
F +49 (0) 54 42 98 79 - 33  
M [info@lubing.de](mailto:info@lubing.de)

[LUBING.COM](http://LUBING.COM)

As of: May 2026 | We reserve the right to make technical changes, further developments and improvements.  
No. 0815-1

## PRESSURE REGULATOR „OPTIMA“ AND OPTIMA E-FLUSH FOR POULTRY DRINKING-SYSTEMS

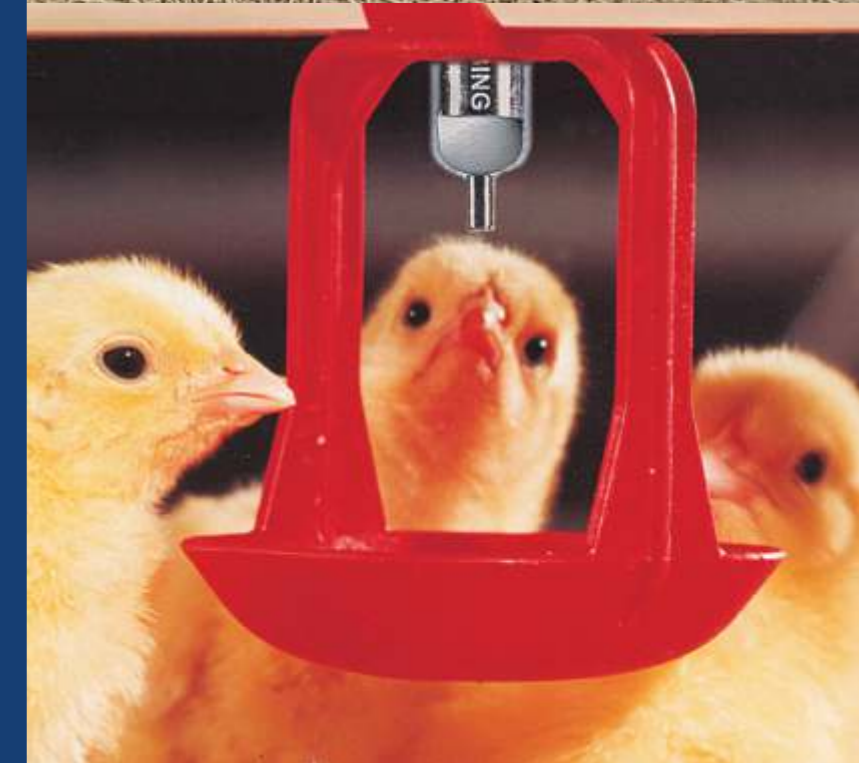

# OPTIMA

## SELECTION AND VERSIONS



Transition piece from the pressure regulator to:

1 22 mm Square pipe : Item no. 3303-00	2 28 mm Square pipe : Item no. 3304-00
--	--

Breather unit Breather unit

Hanger	Connection	3	4	5	3	4	5
None	Front	3221-00	3221-6-00	3221-9-00	3231-00	3231-6-00	3231-9-00
	Middle	3226-00	3226-6-00	3226-9-00	3236-00	3236-6-00	3236-9-00
6 Turkey Profile	Front	-	-	-	3211-00	3211-6-00	3211-9-00
	Middle	-	-	-	3216-00	3216-6-00	3216-9-00
7 Aluminium Profile	Front	3201-00	3201-6-00	3201-9-00	-	-	-
	Middle	3206-00	3206-6-00	3206-9-00	-	-	-

### Optional accessories:

- 8 Transition piece to 3/4" hose: Art. No. 3306-00
- 9 Transition piece to 3/4" round pipe: Art. No. 3305-00
- 10 Shut-off valve: Art. No. 3325-00

# OPTIMA E-FLUSH

## SELECTION AND VERSIONS



LUBING pressure regulator with 450 mm 8 breather		With actuator		Without actuator	
Hanger	Connection	Transition pieces from pressure regulator to:		Transition pieces from pressure regulator to:	
		1 22 x 22 mm square tube	2 28 x 28 mm square tube	1 22 x 22 mm square tube	2 28 x 28 mm square tube
Small	Front	3255-01-00	3256-01-00	3255-00	3256-00
	Middle	3255-03-00	3256-03-00	3255-02-00	3256-02-00
5 Turkey profile	Front	-	3252-01-00	-	3252-00
	Middle	-	3252-03-00	-	3252-02-00
6 Aluminum profile	Front	3251-01-00	-	3251-00	-
	Middle	3251-03-00	-	3251-02-00	-
7 Round pipe profile	Front	3253-01-00	3254-01-00	3253-00	3254-00
	Middle	3253-03-00	3254-03-00	3253-02-00	3254-02-00

### Optional accessories:

- 3 Transition piece to 3/4" hose: Art. No. 3306-00
- 4 Transition piece to 3/4" round pipe: Art. No. 3305-00
- 11 Shut-off valve: Art. No. 3325-00

All pressure regulators OPTIMA E-Flush can be equipped with 600 mm (-6) 9 and 900 mm (-9) 10 breathers in addition to the standard 450 mm 8 breather. For this purpose, the part numbers before -00 are extended by the corresponding variant number (-6or -9). Example: 3254-02-6-00

## ADVANTAGES

- » stepless adjustment of the water column
- » attachments and adapters for all common systems
- » easy assembly
- » manual flushing device