

LUBING

POULTRYTEC



**ELECTRICAL
DOSER 24 V
FOR POULTRY
IN MOBILE HOUSES**



ELECTRICAL DOSER WITH 24 V FOR MOBILE HOUSES

With the electric doser 24 V, we have expanded our dosing range for use in mobile stalls. With this we make it possible to directly use the often self-sufficient power supply with 24 V DC. The doser can also be used for the often used water tanks with low water pressure and small amounts of water. With the stepper motor pump used, extremely precise dosing quantities are achieved. With this dosing technology, we also achieve a very high degree of mixing, which is particularly important when smaller quantities of water are purchased.




Electrical Doser 24 V Item no. 4283

TECHNICAL DATA

| Version | Permissible pressure range | Max. dosing rate | Adjustable dosing | Minimum flow rate |
|---------|----------------------------|------------------|-------------------|--------------------------------------|
| 3/4" | 0,1 - 3,0 bar | 5,0 l/h | 0,01 - 15,0 % | 3,5 l/h (minimum of 400 laying hens) |

If the power supply is different, the electric doser 24 V DC can be connected to an input voltage of 110-230 V using our power supply unit (Item 4493).

DOSING RANGE

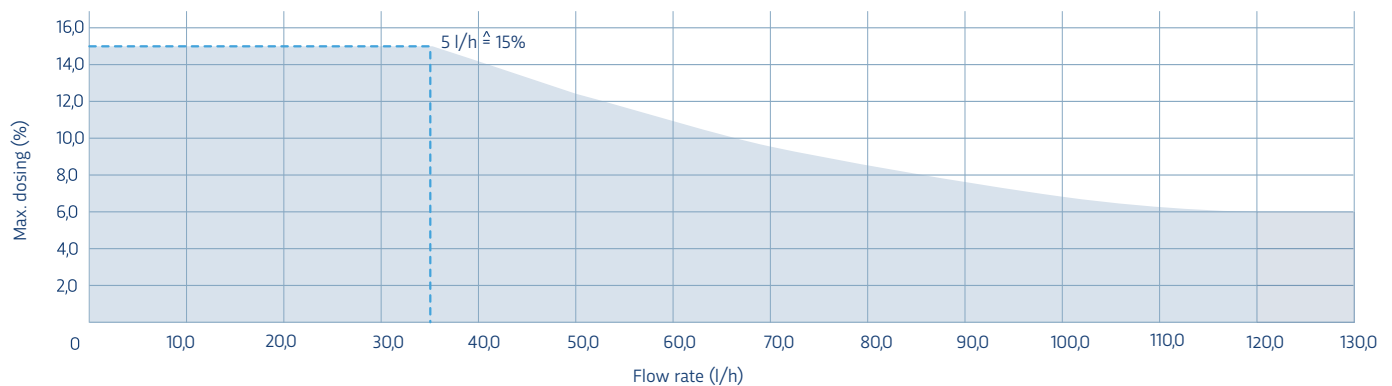

ADVANTAGES

- » Touch display for easy operation
- » intuitive operation and menu structure
- » 24V DC dosing unit for stand-alone systems
- » no pressure loss, in comparison to the mechanical dosing unit
- » can be operated with a water tank
- » Very high mixing ratio, due to stepper motor pump

SUITABLE COMPLEMENT

Main water supply | Automatic flushing |
Top-Climate-Systems for poultry

LUBING
POULTRYTEC

LUBING Maschinenfabrik GmbH & Co. KG
Lubingstraße 6 | 49406 Barnstorf
Germany

T +49 (0) 54 42 98 79 - 0
F +49 (0) 54 42 98 79 - 33
M info@lubing.de

LUBING.COM

As of: May 2026 | We reserve the right to make technical changes, further developments and improvements.
Nr. 0835-1