# LUBING
## STABLETEC

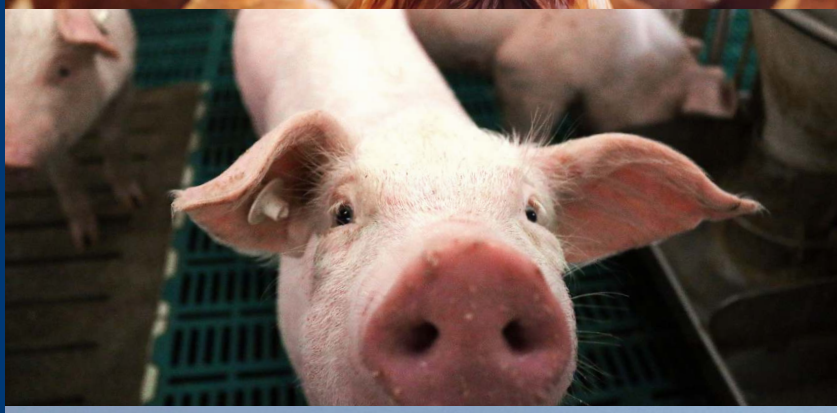

# PLASTIC-PADS
## FOR THE PAD-CLIMATE-SYSTEM

# PLASTIC-PAD FOR EVAPORATIVE COOLING

The plastic-pad provides efficient evaporative cooling in poultry and pig houses. The special grid structure ensures uniform water distribution and good wetting with low pressure loss. Durable, thermally welded polypropylene plates create a long-lasting pad that is UV-resistant and resistant to most of all chemicals, and is also easy to clean.

## VERSIONS

| Dimensions | Item No. |
|---|---|
| 500 x 600 x 150 mm | 7988-0500 |
| 1.000 x 600 x 150 mm | 7988-1000 |
| 1.500 x 600 x 150 mm | 7988-1500 |
| 1.800 x 600 x 150 mm | 7988-1800 |
| 2.000 x 600 x 150 mm | 7988-2000 |
| 2.200 x 600 x 150 mm | 7988-2200 |
| 2.400 x 600 x 150 mm | 7988-2400 |

Other versions available on request.

## TECHNICAL DATA

### Efficiency and pressure drop

Outside: 32,4°C at 36,7 % relative humidity
Inside: 24,5°C at 73,0 % relative humidity

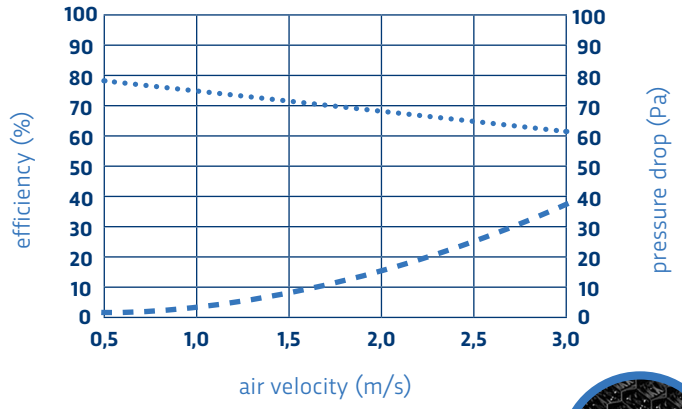

Test Facility

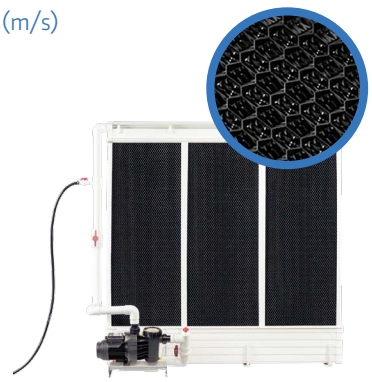

## ADVANTAGES

» Low pressure loss of only 10 Pa at an airflow of 1.5 m/s.

» Robust and easy to clean thanks to thermally welded polymer plates made of polypropylene.

» High cooling performance with good wetting.

» Less splash water due to the special pad geometry.

LUBING
STABLETEC

LUBING Maschinenfabrik GmbH & Co. KG
Lubingstraße 6 | 49406 Barnstorf
Germany

T +49 (0) 54 42 98 79 - 0
F +49 (0) 54 42 98 79 - 33
M info@lubing.de

**LUBING.COM**

As of: Sept. 2026 | We reserve the right to make technical changes, further developments and improvements.
No. 0849-1